

Animat's signature product, the Interlocktm Rubber Flooring System, represents the final word in floor covering to protect against abrasive or concrete floors. The Interlocktm rubber flooring provides the comfort and security to allow your cows to perform up to their genetic potential, which helps to significantly improve the productivity of your herd.

General specifications

Use: Stalls, rotary or standard milking parlours,

walkways, free stalls holding areas and

return lanes.

Compatibility: Adapts to all existing cleaning systems,

sluicing systems with fixed or moveable

scrapers and slatted floors.


Composition: 100% recycled rubber, exclusively

designed.

Surface: Non-slip surface that evacuates water.

Underside: Grooved to evacuate liquid.



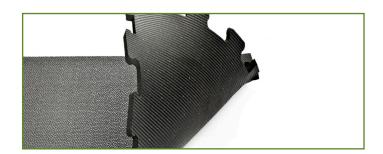

Size (custom order available)

Thickness: 0,740" (+/- 0,030")

19 mm (+/- 0,76 mm)

Maximum length: 72" (+/- 0,031")

1828 mm (+/- 0,79 mm)

Width: 12" to 48" (+/- 0,031")

304,80 mm to 1220 mm (+/- 0,79 mm)



Other information

ant matea

Distributed by:

Average weight: $4,3 \text{ lb/ft}^2 (+/-0.1 \text{ lb})$

1,95 kg/ft² (+/- 0,045 kg)

Installation: Simple and quick with split drive nails.

Interlock: Available on 1, 2, 3 or 4 sides.

