





Slatted floor

The slatted rubber flooring is the perfect solution for your cattle facilities or for your dairy installations. Easy to install with the new and improved anchors. This solution has never been more straightforward.

General specifications

- Use:** Slatted floors.
- Compatibility:** Adapts to all existing or pending construction of slatted floor.
- Composition :** 100% recycled rubber exclusively designed.
- Surface:** Non-slip surface that evacuates water.
- Underside:** Grooved to evacuate liquid.

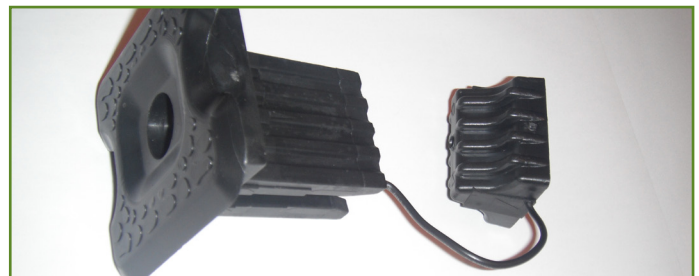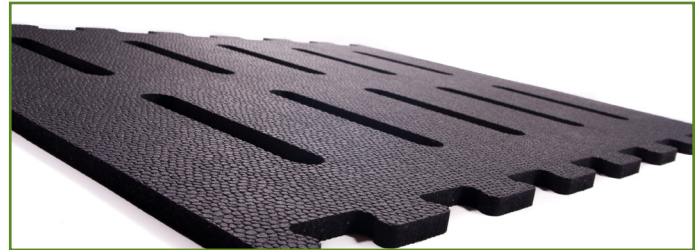

Size

- Thickness:** 0,740" (+/- 0,030")
19 mm (+/- 0,76 mm)
- Size and layout:** All slatted floor systems are custom-made to match your plans or existing facilities.
- Anchors:** Many sizes available, refer to the accessories technical sheet.



Other information

- Weight:** 4,3 lb/ft² (+/- 0,1 lb)
1,95 kg/ft² (+/- 0,045 kg)
- Installation:** Simple and quick.
- Interlock:** Available.



Distributed by:

